

# MAC

## BRONCO FLOOR UNIT

Automatic Battery Back Up Generator for the Essentials



|                     |                          |
|---------------------|--------------------------|
| MAX INPUT:          | 4800 Watts, 120 Volts AC |
| MAX INPUT CURRENT:  | 40 A                     |
| MAX OUTPUT:         | 3000 Watts, 120 Volts AC |
| MAX OUTPUT CURRENT: | 20 A                     |
| MAX SUPPLY CURRENT: | 10 KA                    |
| NO. OF PHASES:      | SINGLE PHASE             |
| MAX BATTERY:        | 3.6/7.2 KWH              |
| FREQUENCY:          | 60 HZ                    |
| AMBIENT TEMP RANGE: | -10°C/+40°C              |
| WEIGHT:             | 165 LBS                  |
| OVERALL DIMENSIONS: | 16.8"W X 16.2"D X 30.7"H |



### LIFEPO4 LITHIUM BATTERY

12 VOLT DC

300 AMP HOUR (AH)

200 AMP BATTERY MANAGEMENT SYSTEM (BMS)

### ESSENTIALS

-Refrigerator, Wifi, Garage Door Opener,  
LED Lighting, Gas Heat, Receptacles for:  
Laptop, Cellphone, Security System, Ceiling Fans.

### INSTALLATION REQUIREMENTS

For more detailed information refer to the  
installation guide.

### DETAILS:

Unit sits on the floor within 4' of the electrical  
panel.  
Install the pre-wired 4' long, 1" flex from the unit  
into the existing electrical panel.

### WARRANTY

2 Year parts and labor

Patented Technology


# MAC

## BRONCO FLOOR UNIT

Automatic Battery Back Up Generator for the Essentials

### Dimensions

Required dimensions for floor installation.

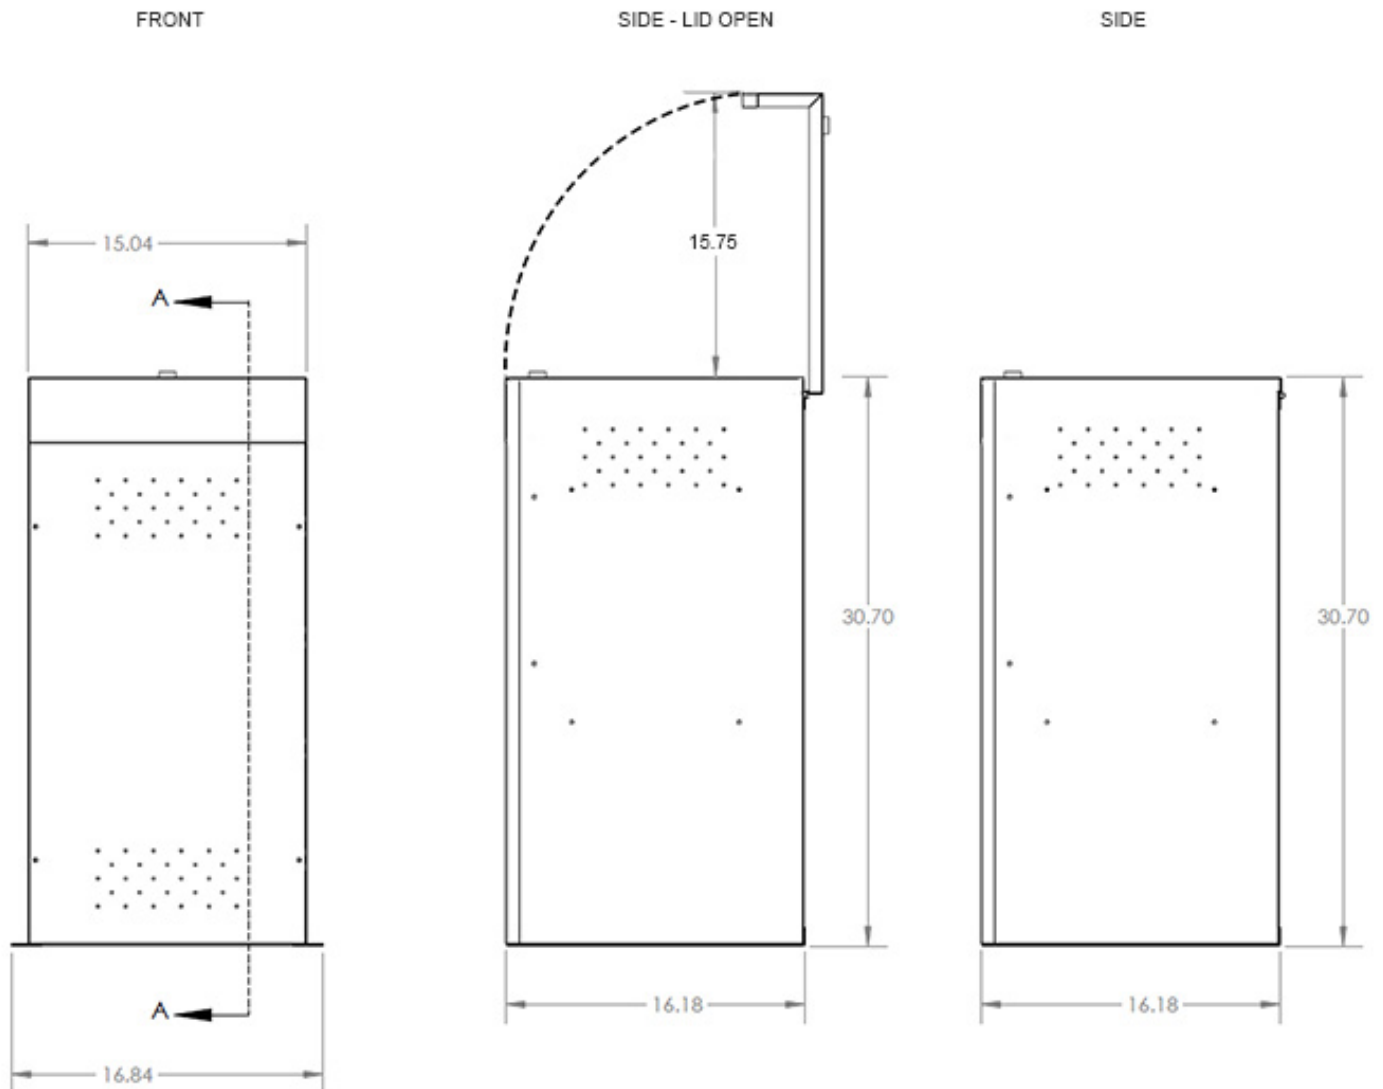


# MAC

## BRONCO FLOOR UNIT

Automatic Battery Back Up Generator for the Essentials


### Installation Specifications

Required clearances for floor installation.

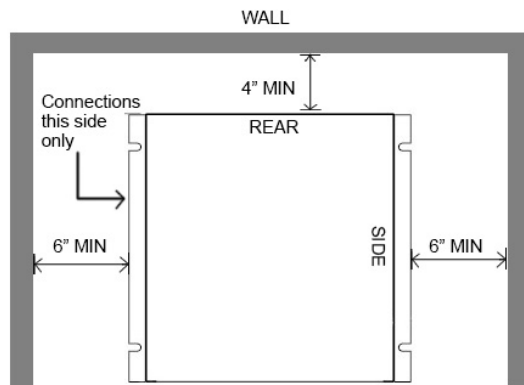

Clear floor space, do not block  
Bronco front access

### Connections

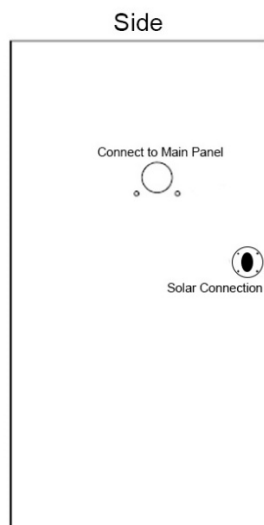

# BRONCO IN-WALL UNIT

Automatic Battery Back Up Generator for the Essentials



|                     |                          |
|---------------------|--------------------------|
| MAX INPUT:          | 4800 Watts, 120 Volts AC |
| MAX INPUT CURRENT:  | 40 A                     |
| MAX OUTPUT:         | 3000 Watts, 120 Volts AC |
| MAX OUTPUT CURRENT: | 20 A                     |
| MAX SUPPLY CURRENT: | 10 KA                    |
| NO. OF PHASES:      | SINGLE PHASE             |
| MAX BATTERY:        | 3.6/7.2 KWH              |
| FREQUENCY:          | 60 HZ                    |
| AMBIENT TEMP RANGE: | -10°C/+40°C              |
| WEIGHT:             | 189 LBS                  |
| OVERALL DIMENSIONS: | 63.5"H X 21.5"W X 6"D    |



## LIFEPO4 LITHIUM BATTERY

12 VOLT DC  
300 AMP HOUR (AH)  
200 AMP BATTERY MANAGEMENT SYSTEM (BMS)

## ESSENTIALS

-Refrigerator, Wifi, Garage Door Opener,  
LED Lighting, Gas Heat, Receptacles for:  
Laptop, Cellphone, Security System, Ceiling Fans.

## INSTALLATION REQUIREMENTS

For more detailed information refer to the  
installation guide.

## DETAILS:

Unit is installed between 2" X 6" studs spaced  
20" apart.  
Install a 1" flex from the unit inside the wall into  
the existing electrical panel. Not to exceed 4'

## WARRANTY

2 Year parts and labor  
Patented Technology




# BRONCO IN-WALL UNIT

Automatic Battery Back Up Generator for the Essentials

## Installation Specifications


### BRONCO IN-WALL

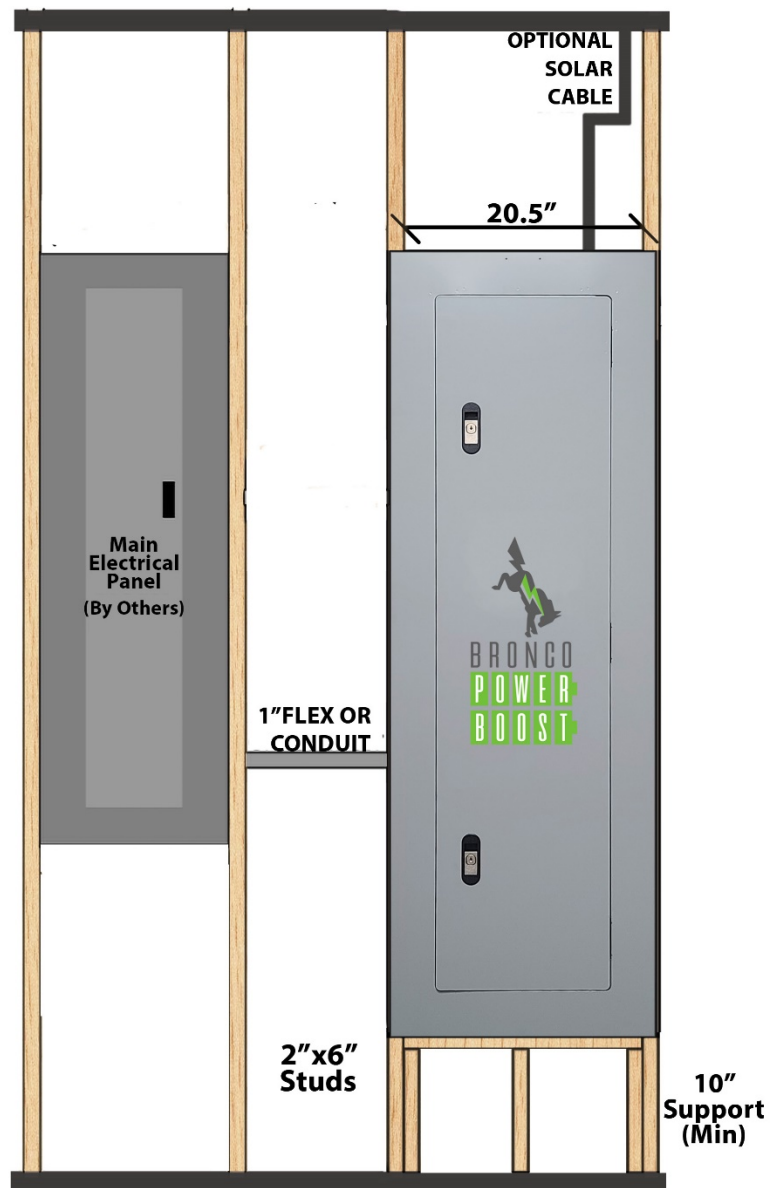

# BRONCO IN-WALL UNIT

Automatic Battery Back Up Generator for the Essentials

## Connections

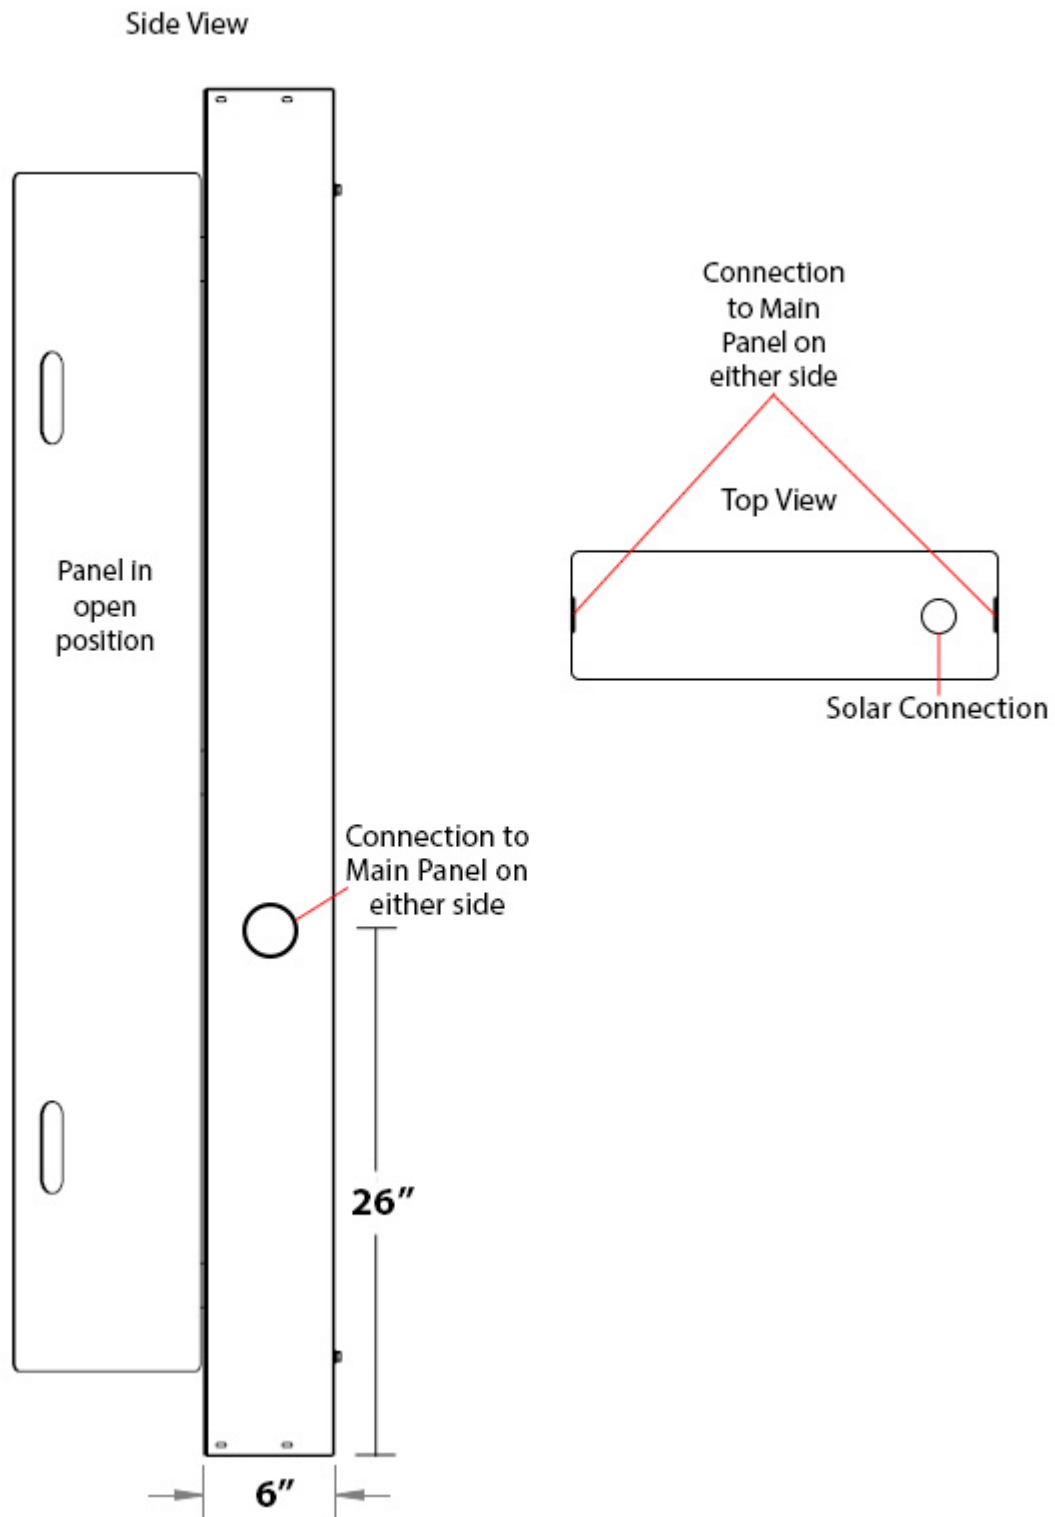

# BRONCO ON-WALL UNIT

Automatic Battery Back Up Generator for the Essentials



|                     |                          |
|---------------------|--------------------------|
| MAX INPUT:          | 4800 Watts, 120 Volts AC |
| MAX INPUT CURRENT:  | 40 A                     |
| MAX OUTPUT:         | 3000 Watts, 120 Volts AC |
| MAX OUTPUT CURRENT: | 20 A                     |
| MAX SUPPLY CURRENT: | 10 KA                    |
| NO. OF PHASES:      | SINGLE PHASE             |
| MAX BATTERY:        | 3.6/7.2 KWH              |
| FREQUENCY:          | 60 HZ                    |
| AMBIENT TEMP RANGE: | -10°C/+40°C              |
| WEIGHT:             | 189 LBS                  |
| OVERALL DIMENSIONS: | 62"H X 20"W X 6"D        |



## LIFEPO4 LITHIUM BATTERY

12 VOLT DC

300 AMP HOUR (AH)

200 AMP BATTERY MANAGEMENT SYSTEM (BMS)

## ESSENTIALS

-Refrigerator, Wifi, Garage Door Opener,  
LED Lighting, Gas Heat, Receptacles for:  
Laptop, Cellphone, Security System, Ceiling Fans.

## INSTALLATION REQUIREMENTS

For more detailed information refer to the  
installation guide.

## DETAILS:

Unit is installed indoors on the surface of the wall.  
Install a 1" flex from the unit into the existing  
electrical panel. Not to exceed 4'

## WARRANTY

2 Year parts and labor


Patented Technology

# BRONCO ON-WALL UNIT

Automatic Battery Back Up Generator for the Essentials

## Dimensions

Required dimensions for on-wall installation.

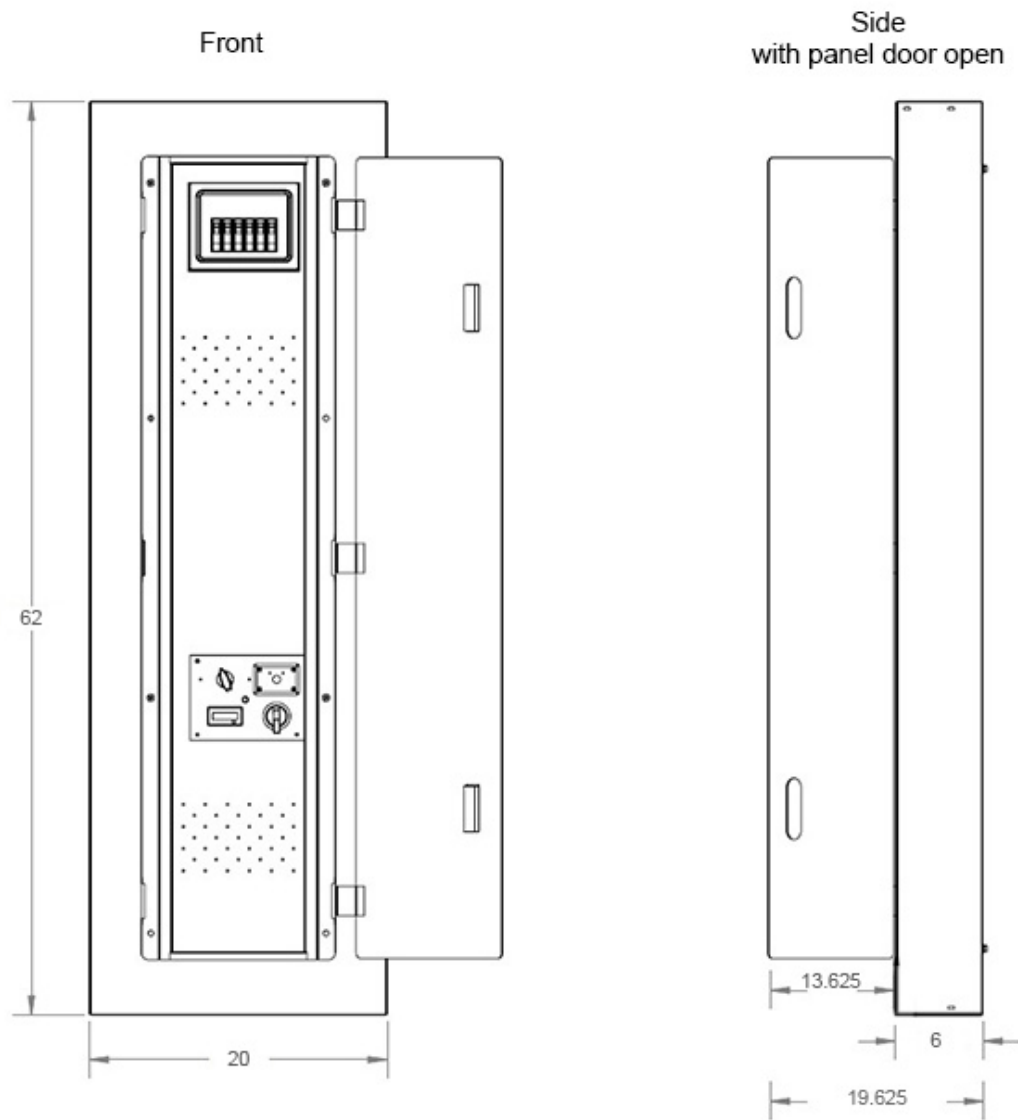


# BRONCO ON-WALL UNIT

Automatic Battery Back Up Generator for the Essentials

## Installation Specifications


### On-Wall Outside Unit

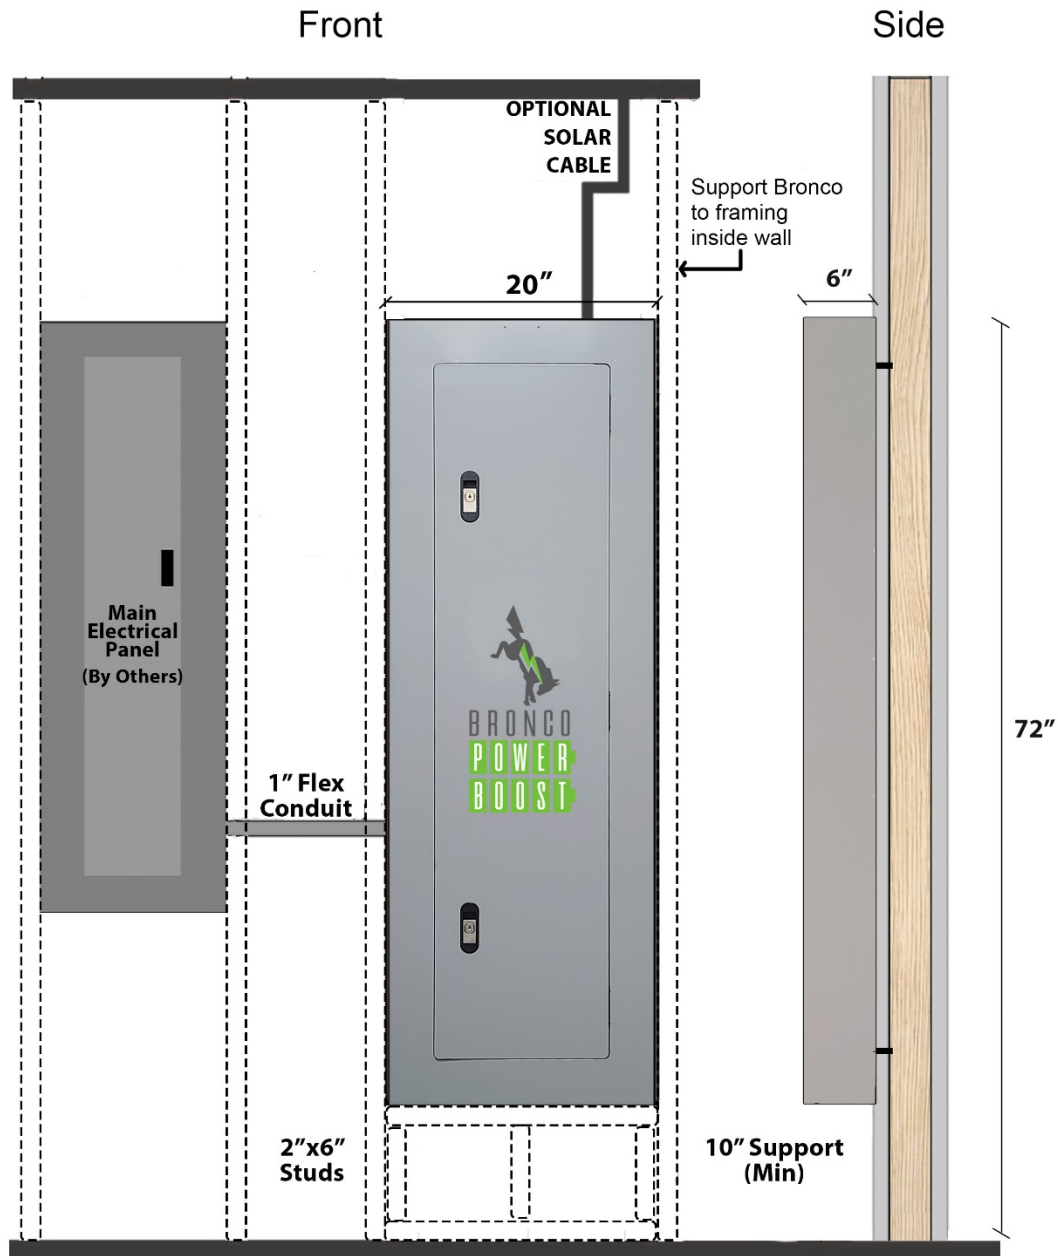

# BRONCO ON-WALL UNIT

Automatic Battery Back Up Generator for the Essentials

## Connections

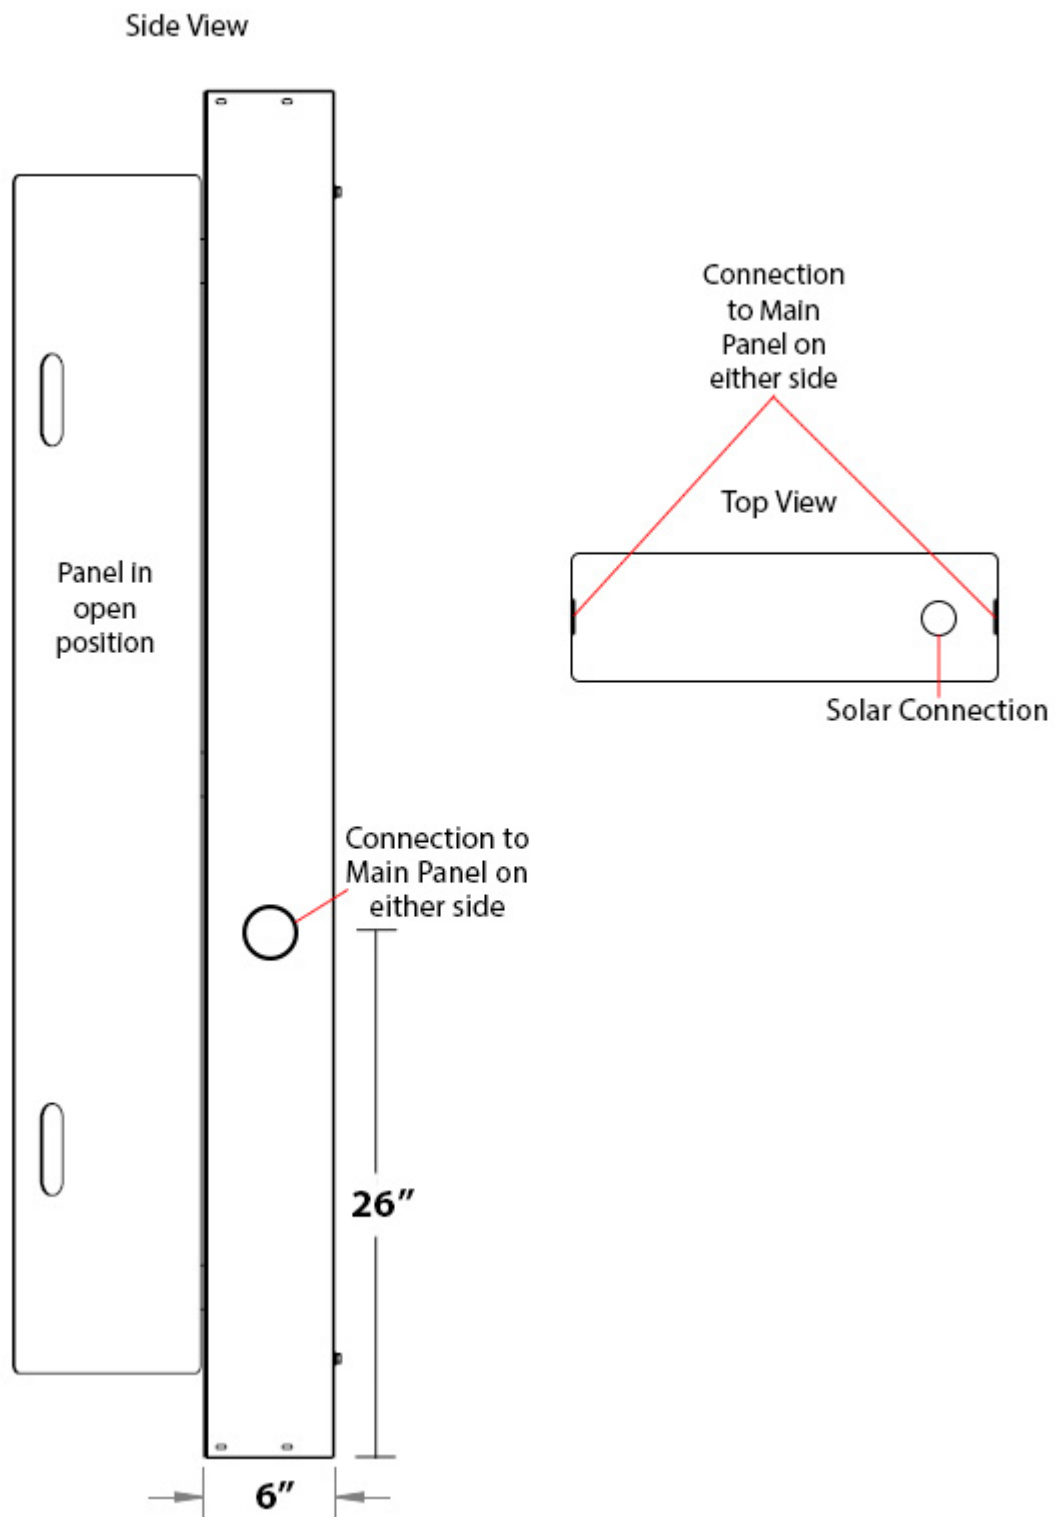

# BRONCO ON-WALL OUTSIDE UNIT

Automatic Battery Back Up Generator for the Essentials



|                     |                          |
|---------------------|--------------------------|
| MAX INPUT:          | 4800 Watts, 120 Volts AC |
| MAX INPUT CURRENT:  | 40 A                     |
| MAX OUTPUT:         | 3000 Watts, 120 Volts AC |
| MAX OUTPUT CURRENT: | 20 A                     |
| MAX SUPPLY CURRENT: | 10 KA                    |
| NO. OF PHASES:      | SINGLE PHASE             |
| MAX BATTERY:        | 3.6/7.2 KWH              |
| FREQUENCY:          | 60 HZ                    |
| AMBIENT TEMP RANGE: | -10°C/+40°C              |
| WEIGHT:             | 189 LBS                  |
| OVERALL DIMENSIONS: | 62"L X 20"W X 6"D        |



## LIFEPO4 LITHIUM BATTERY

12 VOLT DC  
300 AMP HOUR (AH)  
200 AMP BATTERY MANAGEMENT SYSTEM (BMS)

## ESSENTIALS

-Refrigerator, Wifi, Garage Door Opener,  
LED Lighting, Gas Heat, Receptacles for:  
Laptop, Cellphone, Security System, Ceiling Fans.

## INSTALLATION REQUIREMENTS

For more detailed information refer to the  
installation guide.

## DETAILS:

Unit is installed outdoor on the surface of the  
wall.  
Install a 1" weatherproof  
flex from the unit into the existing electrical panel.  
Not to exceed 4'

## WARRANTY


2 Year parts and labor  
Patented Technology

# BRONCO ON-WALL OUTSIDE UNIT

Automatic Battery Back Up Generator for the Essentials

## Dimensions

Required dimensions for on-wall installation.

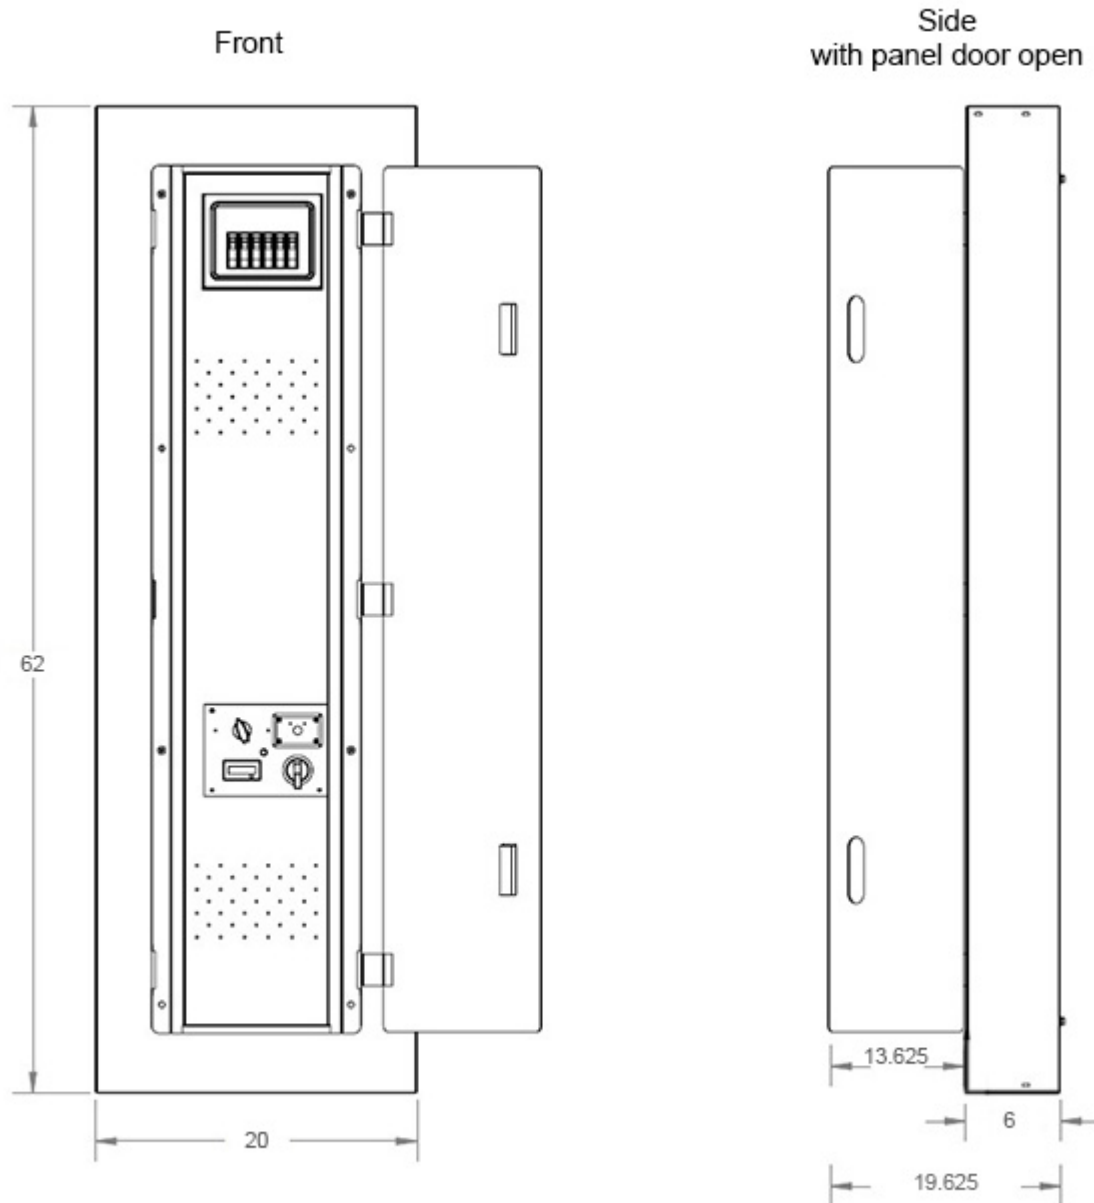


# BRONCO ON-WALL OUTSIDE UNIT

Automatic Battery Back Up Generator for the Essentials

## Installation Specifications

### On-Wall Outside Unit

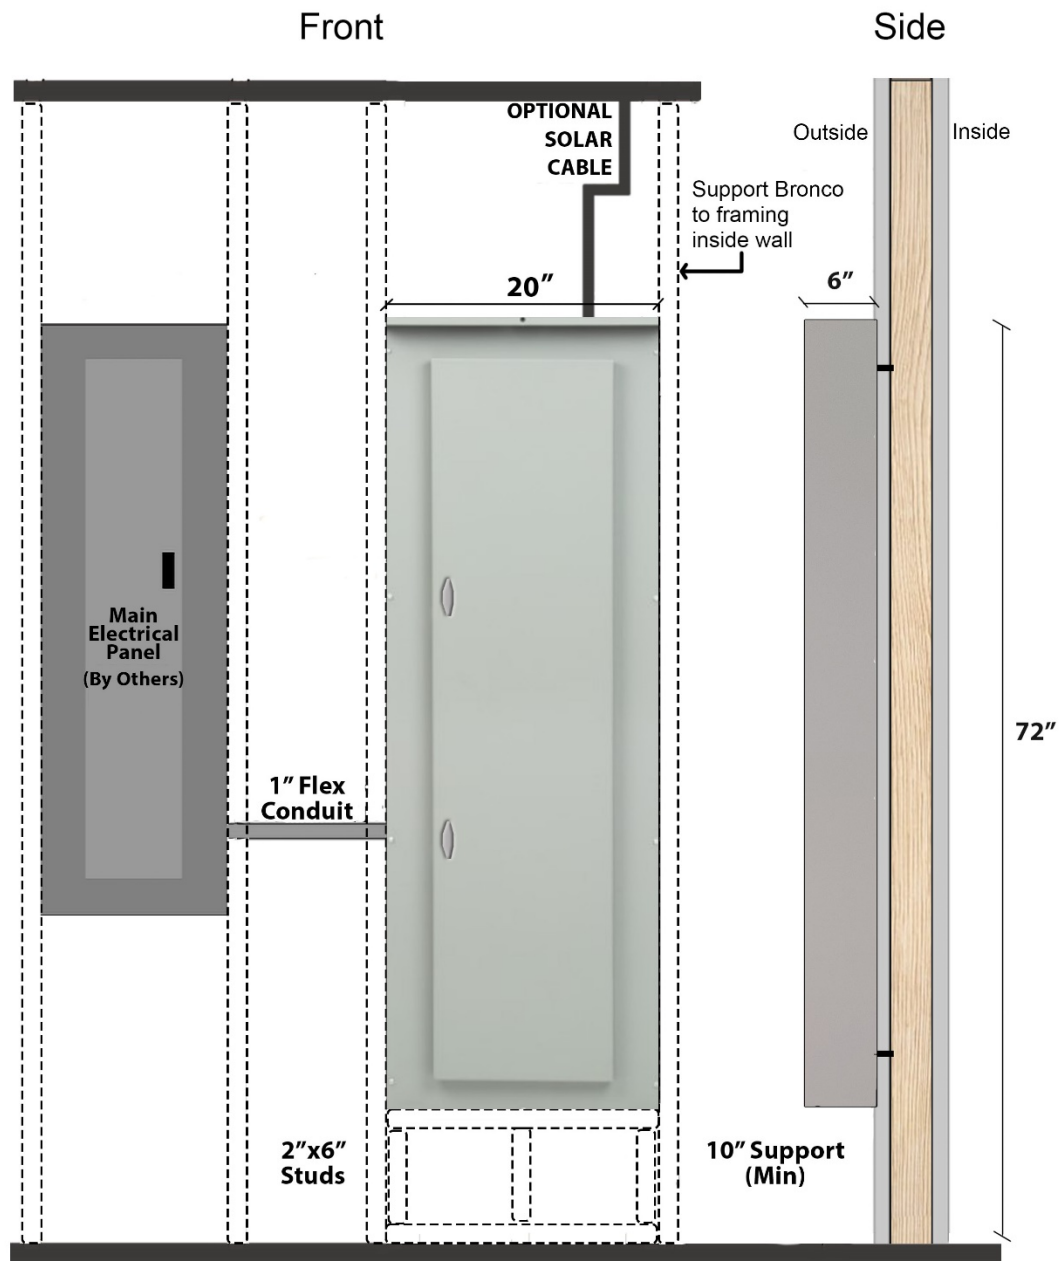

# BRONCO ON-WALL OUTSIDE UNIT

Automatic Battery Back Up Generator for the Essentials

## Connections

